KOBELCO

LONG REACH ATTACHMENT

SK2101

■50 ft

Max. Digging Reach: 15,820 mm Digging Depth: 12,010 mm

■60 ft

Max. Digging Reach: 18,180 mm Digging Depth: 14,110 mm

SK2601

■60 ft

Max. Digging Reach: 18,530 mm Digging Depth: 14,730 mm

Reaches Further and Deeper with Smooth, Stable Power

- Ideally suited to dredging, leveling, and other long reach operations.
- Extra-long crawlers ensure stability.
- Fuel-efficient diesel engine provides plenty of digging power.







LONG REACH ATTACHMENT

WORKING RANGES

SK210_{LC}

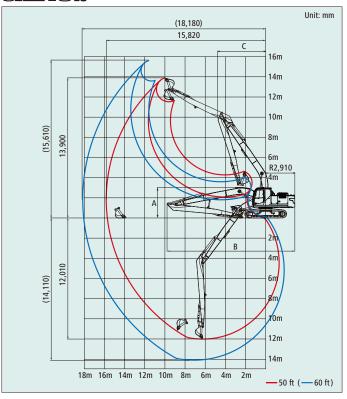

SK260_{LC}

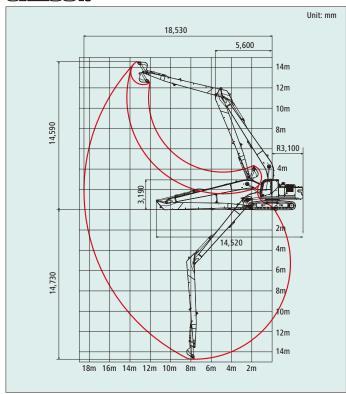

MAIN SPECIFICATIONS

Model	SK210LC				SK260LC		
Туре	SK210LC-10				SK260LC-10		
Long reach attachment		50 ft		60 ft		60 ft	
Bucket capacity ISO heaped	m³	0.45		0.27		0.4	
Shoe width	mm	600	800	600	800	600	800
Operating weight	kg	22,800	23,400	24,200	24,900	27,000	27,600
Ground pressure	kPa	47	37	50	39	53	41
Swing speed	min ⁻¹	13.3		7.0		10.8	
Travel speed	km/h	6.0/3.6		6.0/3.6		6.1/3.8	
Gradeability	% (°)	70 (35)		70 (35)		70 (35)	
Boom length	mm	8,750		9,900		10,350	
Arm length	mm	6,350		7,900		8,250	
Overall height (A)	mm	3,120		3,190		3,190	
Overall length (B)	mm	12,690		13,860		14,520	
Min. swing radius (C)	mm	4,720		5,170		5,600	

Note: This catalog may contain attachments and optional equipment that are not available in your area. And it may contain photographs of machines with specifications that differ from those of machines sold in your areas. Please consult your nearest KOBELCO distributor for those items you require. Due to our policy of continuous product improvements all designs and specifications are subject to change without advance notice. Copyright by **KOBELCO CONSTRUCTION MACHINERY CO., LTD.** No part of this catalog may be reproduced in any manner without notice.

KOBELCO CONSTRUCTION MACHINERY CO., LTD.

5-15 kitashinagawa 5-chome, Shinagawa-ku, Tokyo 141-8626 JAPAN Tel: +81 (0) 3-5789-2146 Fax: +81 (0) 3-5789-2135 www.kobelco-kenki.co.jp/english_index.html

Inquiries To:			